

Style 7500

OPENNESS FACTOR

0%

UV BLOCKAGE

Approximately 100%

COMPOSITION

100% Polyester with Acrylic Coating (PVC-Free)

WIDTH

118" (300 cm)

WEIGHT

12.14 oz/yd² (412 g/m²)

THICKNESS

0.014" (0.356mm)

FIRE CLASSIFICATIONS

NFPA 701-2004 TM#1

California U.S. Title 19

CAN/ULC-S109-03 Small & Large Flame Test

ENVIRONMENTAL BENEFITS

RoHS – Lead Free

GREENGUARD Gold

ACOUSTICAL VALUE

NRC - 0.00 SAA - 0.03

BACTERIAL & FUNGAL RESISTANCE


ASTM E2180

CARE & CLEANING


Remove dust with a vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating of the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the shade down until completely dry. You can also very gently rub the fabric with a clean white pencil eraser to remove small stains.




R22 MIDNIGHT

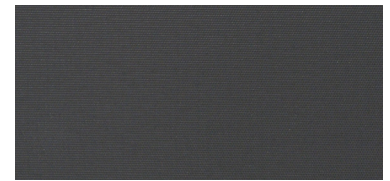


R21 ORIENT

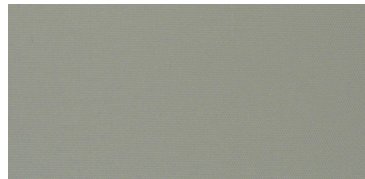


R17 DUNE

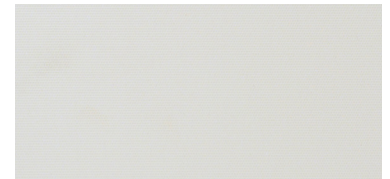


R39 CLOUD

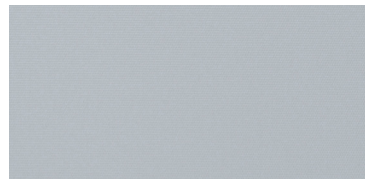


R97 MIST

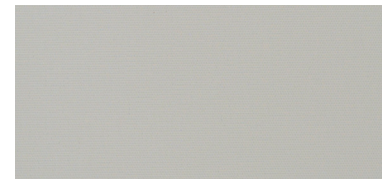

R40 PORCELAIN

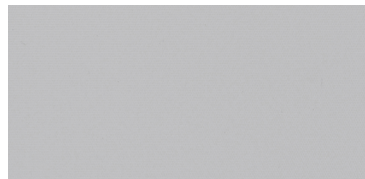


R41 LIMESTONE

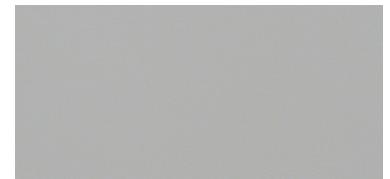

R42 NIMBUS




R13 ICE

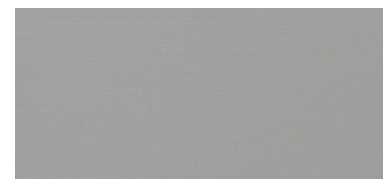

R43 TUNDRA




R19 STONE

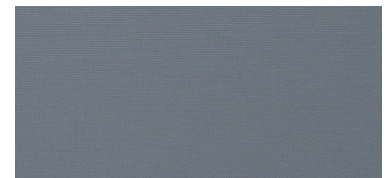

R20 ODYSSEY

DUAL SIDED FABRICS


Style 7500 (Continued)

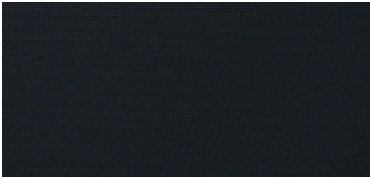


R99 MIDNIGHT (FACE)



R99 MIDNIGHT (BACK)

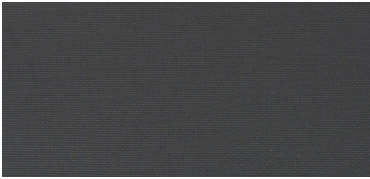

S97 ORIENT (FACE)

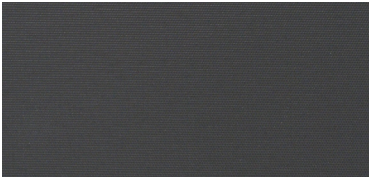

S97 ORIENT (BACK)